



THE BUG BLOCKER® SCREEN

SERVICE DOOR
SCREEN INSERT

COMPANY		PREPARED BY	
EMAIL		PHONE NUMBER	
ADDRESS			
CITY		STATE	ZIP
PURCHASE ORDER NUMBER		DATE REQUIRED	QTY
TAG			
SPECIAL INSTRUCTIONS (Please note if this is for a quote)			

Select Standard Insert Sizes or Custom:

- 25 in W x 35 in H
- 25 in W x 31 in H
- 25 in W x 25 in H

A Custom Frame Size Width: _____ in

B Custom Frame Size Height: _____ in

C If the door thickness is not 1-3/4 in what is it? _____ in

D Mesh size?

- 12 mesh stainless 30 mesh stainless
- 16 mesh stainless Special

E Expanded Metal Requires Security Bars: Yes No

F Select Cover Panel:


- Steel Insulated (Standard size only)
- 3/8 in Thick Polycarbonate

G Optional 1/2 in square aluminum security bars spaced 6 in apart? Yes No

H Storage rack? Yes No
(Storage rack may be mounted on bottom half of door if a second insert is not used)

EMAIL SURVEY FORM TO RASCO

TYPICAL DOOR INSIDE VIEW

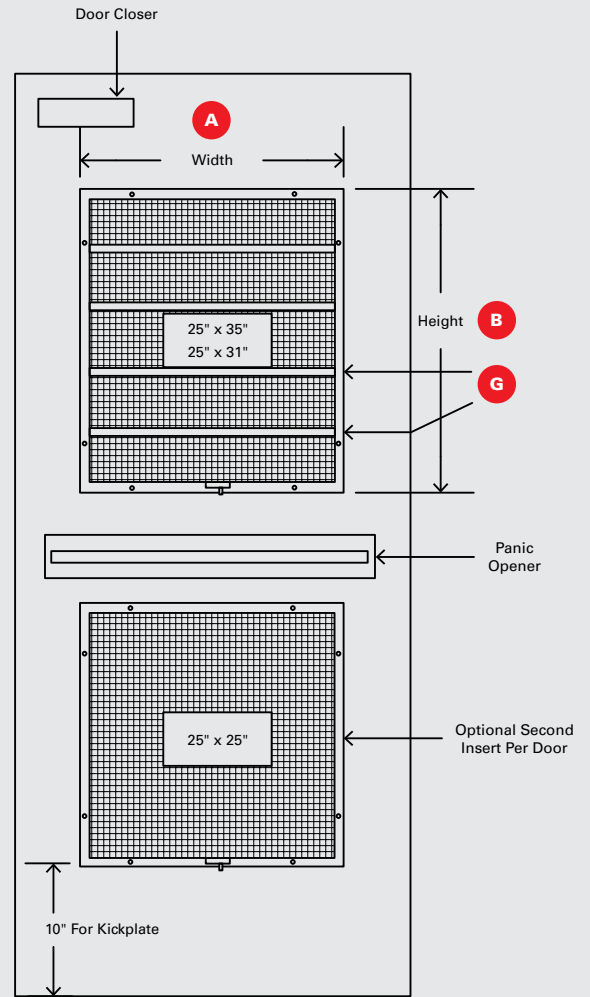

NOTES: Opening size is 1" less than frame size.


Measuring Guide



1

Track to bollard

To make sure you have clearance for your Rasco door.

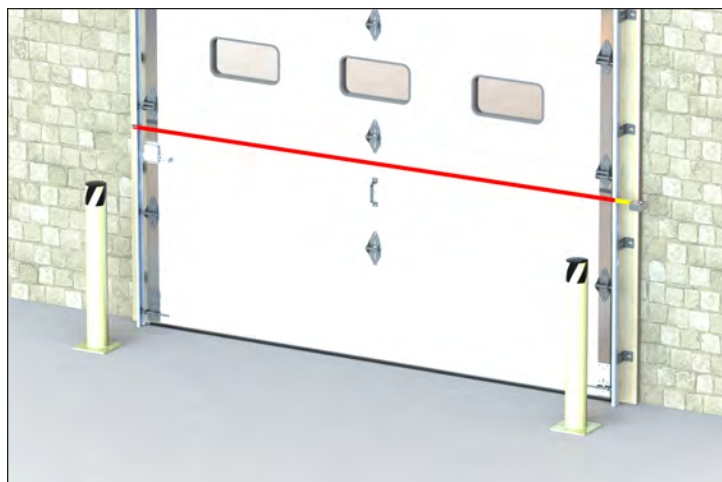

2

Outside to outside of existing track


To ensure a proper fit with your door.



3

Distance from wall to furthest part of existing track at top of the opening

To ensure a proper seal on the sides, many tracks are farther away from wall at top of opening.

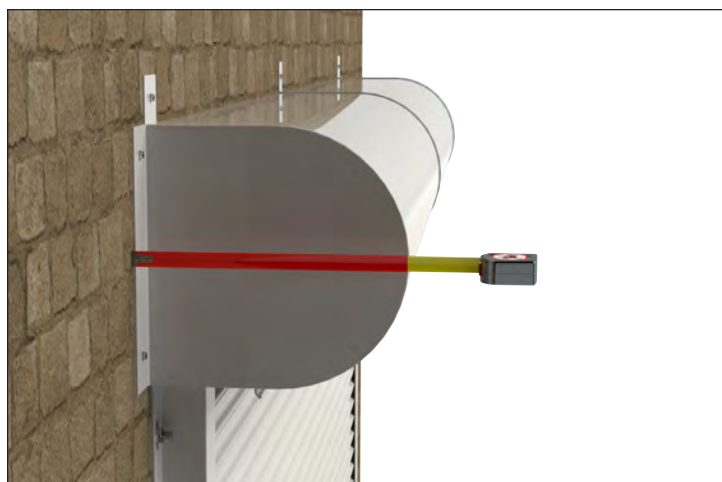

4

Wall to outside edge of roll or distance to back of roll

To ensure a tight seal on the sides.

09/12/22