



THE BUG BLOCKER® SCREEN


STANDARD LIFT
STAND ALONE

COMPANY		PREPARED BY	
EMAIL		PHONE NUMBER	
ADDRESS			
CITY		STATE	ZIP
PURCHASE ORDER NUMBER		DATE REQUIRED	QTY
TAG			
SPECIAL INSTRUCTIONS (Please note if this is for a quote)			

- A** Rasco Door Track Size Needed: 2 in 3 in
- B** Is there any interference for new track? Yes No
- C** Opening Width: ____ ft ____ in
- D** Opening Height: ____ ft ____ in
- E** Is there a brush seal for the perimeter? Yes No
- F** Mesh size?
 - 12 mesh stainless 30 mesh stainless
 - 16 mesh stainless Special
- G** Is the Rasco door to be trolley operated? Yes No


EMAIL SURVEY FORM TO RASCO

DOOR SIDE VIEW

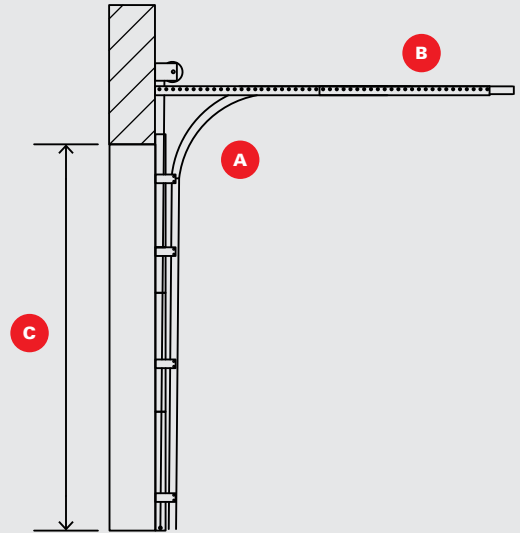

NOTES: Door overlaps opening by 1" on each side.

DOORTOP ABOVE

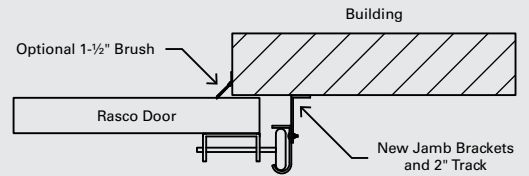

Measuring Guide



1

Track to bollard

To make sure you have clearance for your Rasco door.



2

Outside to outside of existing track

To ensure a proper fit with your door.



3

Distance from wall to furthest part of existing track at top of the opening

To ensure a proper seal on the sides, many tracks are farther away from wall at top of opening.



4

Wall to outside edge of roll or distance to back of roll

To ensure a tight seal on the sides.

09/12/22